




# Model HD72 Watercooled Rotary Sliding Vane Compressor




## Air Performance Figures

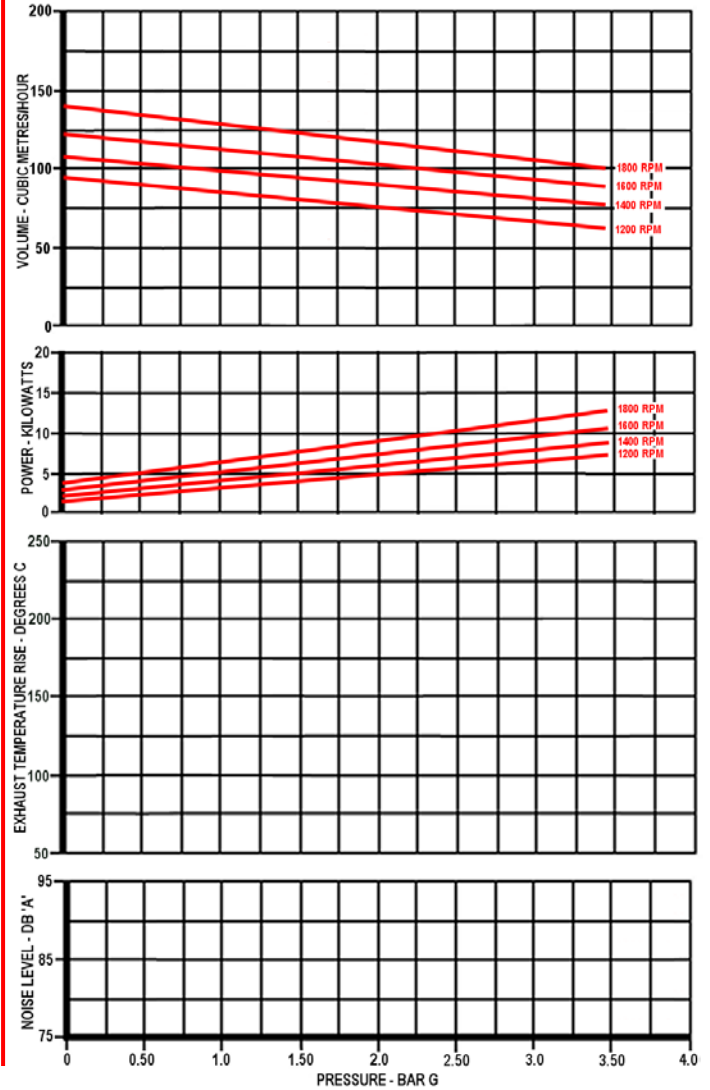

## Materials of Construction

Component	Material Specification
Cylinder	S.G. Iron EN-GJS-400-15 / EN-JS-1030 (EN1563)
Coverplates	S.G. Iron EN-GJS-400-15 / EN-JS-1030 (EN1563)
Rotor / Shaft	S.G. Iron EN-GJS-400-15 / EN-JS-1030 (EN1563)
End Caps	Grey Cast Iron EN-GJL-200 / EN-JL-1030 (EN1561)
Spacing Ring	Grey Cast Iron EN-GJL-200 / EN-JL-1030 (EN1561)
Blades	Non-Asbestos Resin Bonded Fabric
Ball Bearing	Single row deep groove with metal cage. Clearance - Normal
Roller Bearing	Single row, cylindrical roller with metal cage. Clearance - Normal
Lip Seals	Steel cased, Viton
Mechanical Seals	Stainless Steel rings & spring, carbon face, S.G. Iron seat, Viton bellows & O-Ring

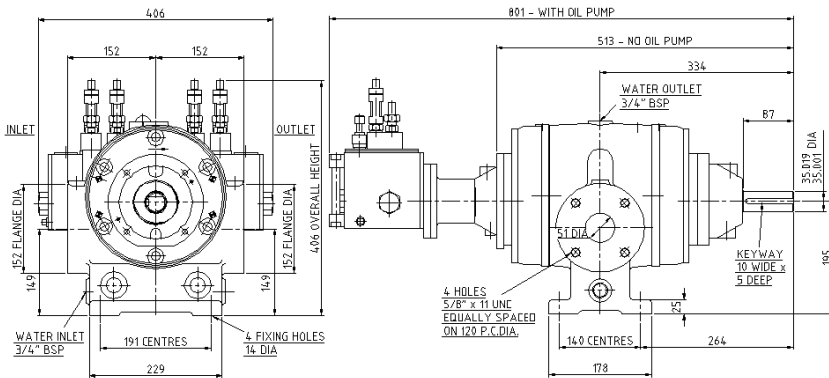

## SPEED

Maximum Speed	-	1800	RPM
Minimum Speed	-	900	RPM

## TEMPERATURE

Max. Inlet Temp.	-	40	°C
------------------	---	----	----

## INERTIA

Moment Of Inertia	-	0.039	Kgm <sup>2</sup>
-------------------	---	-------	------------------

## WEIGHT

Approx. (No oil pump)	-	95	kgs
Approx. (With oil pump)	-	113	kgs

## LUBRICATION

Bearings and blades lubricated using SHELL CORENA P150 oil

## BEARING ARRANGEMENT

Ball bearing with roller bearing at drive end and roller bearing at rear end giving approximate life values for both in excess of 200000 hours.