


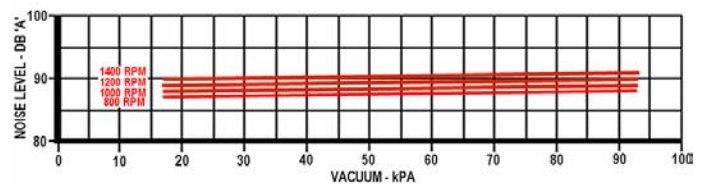


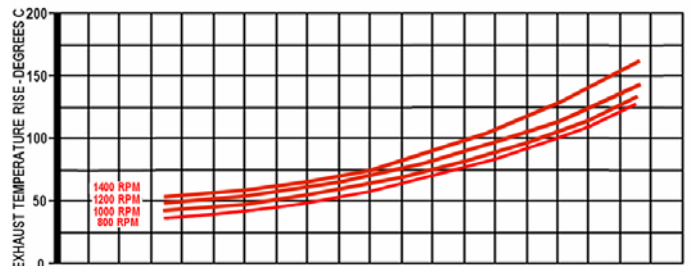

Model MP200 Lubricated Rotary Sliding Vane Vacuum Pump

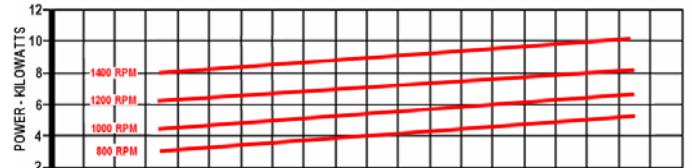


Air Performance Figures

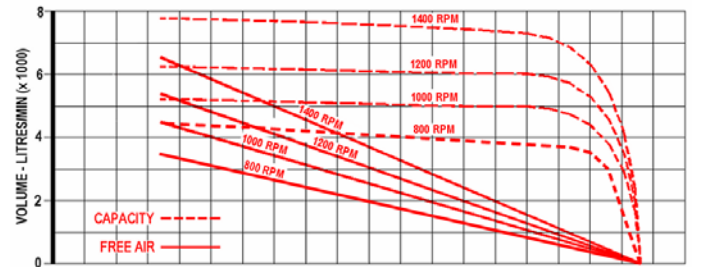

Materials of Construction

Component	Material Specification
Cylinder	Grey Cast Iron EN-GJL-200 / EN-JL-1030 (EN1561)
Coverplates	Grey Cast Iron EN-GJL-200 / EN-JL-1030 (EN1561)
Rotor / Shaft Assembly	S.G. Iron EN-GJS-400-15 / EN-JS-1030 (EN1563)
Sleeves	Grey Cast Iron EN-GJL-200 / EN-JL-1030 (EN1561)
Flanges	Grey Cast Iron EN-GJL-200 / EN-JL-1030 (EN1561)
Blades	Non Asbestos Resin Bonded Fabric
Ball Bearing	Single row, deep groove ball with metal cage Clearance - Normal
Lip Seals	Steel cased, Viton

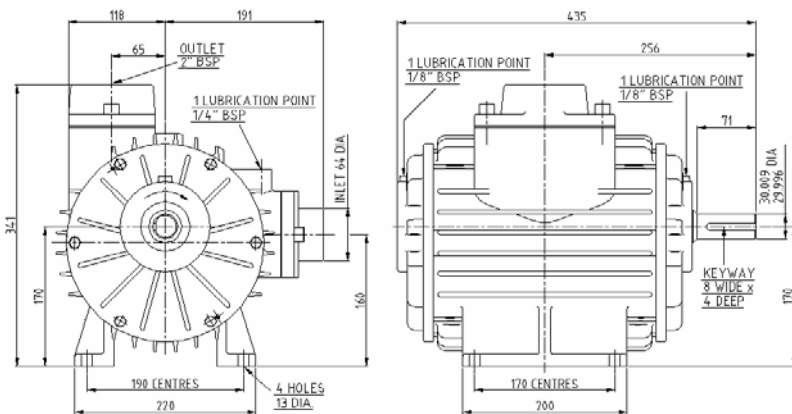

SPEED

Maximum Speed	-	1440	RPM
Minimum Speed	-	900	RPM

TEMPERATURE

Max. Inlet Temp.	-	40	°C
------------------	---	----	----

INERTIA

Moment Of Inertia	-	0.121	Kgm ²
-------------------	---	-------	------------------

WEIGHT

Approximate Weight	-	90	kgs
--------------------	---	----	-----

LUBRICATION

Bearings and blades lubricated using SHELL Rimula 15W/40 oil

BEARING ARRANGEMENT

Ball bearing both ends giving approximate life values of drive end 29000 hours and rear end 52000 hours.